



www.luminetworx.com • 702-602-7719

Luminetworx 2x2 & 2x4 Troffer



Input Power	POE
Power Consumption	30 Watts
CCT	5000K
Luminous Efficacy (lm / w)	195lm/w
Lumens	3640
CRI	RA>80
Dimming	0-100%
Power Factor	>0.9
IP rating	IP44
Beam Angle	120 Degree Beam Angle
Working Temperature	-25 – m40 Degree Celsius
Body Material	Aluminum, PC, ABS
Dimensions	24" x 24" or 24" x 48"
Certification	CE, RoHS
Warranty	5 Years
Lifespan	50000




Direction for operation:

1. Confirm the rated voltage before the installation to keep the product from being damaged.
2. Cut off the power until the installation is finished.
3. Contact us when any problems happen, never open the product without permission.
4. Basic electronic knowledge or professional indication is needed for operator.
5. Product surface temperature control during normal operation environment within 65 °C, the bad environment to reduce product life cycle.
6. Never use the product in a humid environment.

Warranty replacement excludes certain types of physical damage such as fire, flood/moisture, or tampering (in the circumstance that a fixture is improperly removed from its mount or connection causing it to fail).



www.luminetworx.com • 702-602-7719

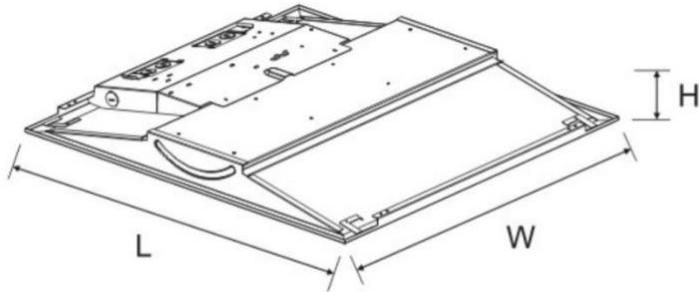

2x2 Troffer 23.78" x 23.78" x 2.16"
 2x4 Troffer 23.78" x 47.79" x 2.16"

Product Size	Carton Size	Qty/ctn	Qty/20GP	Qty/40HQ
2*2FT	L65*W65*H13cm	2pcs	1100pcs	2540pcs
2*4FT	L1255*W65*H13cm	2pcs	560pcs	1320pcs

